

EL 583993708US

JC05 Rec'd PCT/PTO 08 APR 2002

ATTORNEY'S DOCKET NUMBER

101303 / 0506194

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (If known, see 37 CFR 1.5

10/089968

INTERNATIONAL APPLICATION NO.  
PCT/GB00/03827INTERNATIONAL FILING DATE  
6 October 2000PRIORITY DATE CLAIMED  
9 October 1999

## TITLE OF INVENTION

SEPARATION OF SILT AND WATER

## APPLICANT(S) FOR DO/EO/US

LYONS, David and NETHERY, John

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☒ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☐ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

## Items 11 to 20 below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information: Form PCT/RO/101-Request; PCT/IB/308 Notice Informing Applicant of the Communication of the International Application to the Designated Offices; PCT Published Application WO 01/26771 A1 w/Search Report; PCT/IB/332 Information Concerning Elected Offices Notified of Their Election; PCT/IPEA/409 International Preliminary Examination Report including amended claims





26874

PATENT TRADEMARK OFFICE  
Atty. Docket: 69682/0505009

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicant: David Lyons et al.

Group Art Unit:

Serial No.:

Examiner:

Filed: April 8, 2002

U.S. National Phase entry of International  
Application No. PCT/GB00/03827, filed  
October 6, 2000

Title: SEPARATION OF SILT AND WATER

**PRELIMINARY AMENDMENT**

The Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

Before examining the above-captioned patent application, please cancel claims 1-27  
contained in the PCT application and replace them with the claims attached hereto.

**Remarks**

The claims of the present application have been amended herein to bring them into line with  
U.S. patent practice. These claims find full support in the application; no new matter has been added.  
It is respectfully requested that these claims be examined and allowed.

Respectfully submitted,

David Lyons et al.

By: 

Steven J. Goldstein  
Registration No. 28,079  
Attorney for Applicants  
FROST BROWN TODD LLC  
2200 PNC Center  
201 East Fifth Street  
Cincinnati, Ohio 45202  
tel.: (513) 651-6131  
fax: (513) 651-6981

## CLAIMS

1. Apparatus for separating silt from water which comprises a settling tank [1] having an inlet section [2], inlet means comprising an inlet conduit [3] leading to a pre-reaction vessel [4] which communicates at its base with a sump [21] in the inlet section of the settling tank [2], said inlet conduit [3] being valved [30], and the apparatus being equipped with dosing means [31] for the addition of flocculant to an inlet portion thereof, removal means [5] for removing settled material from the sump [21] and means [7] for sweeping settled material along the tank [1] from an outlet section [6] thereof towards such sump [21], and an outlet for the discharge of water over weir means [8].
2. Apparatus according to claim 1, wherein there is a said inlet conduit [3] and pre-reaction vessel [4] at each side of the settling tank [1].
3. Apparatus according to claim 1, wherein said dosing means [31] is arranged to add said flocculant to the or a said inlet conduit [3].
4. Apparatus according to claim 1, wherein the or a pre-reaction vessel [4] at at least one side of the settling tank [1] is in fluid flow communication with a secondary pre-reaction vessel [11] over weir means [12] located therebetween, the or each such secondary pre-reaction vessel [11] also being in communication at its base with the sump [21].
5. Apparatus according to claim 4, wherein the or at least one secondary pre-reaction vessel [11] is in fluid flow communication over weir means [13] with a secondary fluid discharge vessel [14].
6. Apparatus according to claim 4, wherein at least one said weir means [12, 13] bounding a said secondary pre-reaction vessel [11] is adjustable in height.



16. Apparatus according to claim 15, wherein any leakage ports [58] in a said bucket [51] are confined to an upper region of the bucket.

17. Apparatus according to claim 16, wherein any leakage ports in a said bucket are confined to an upper third of the bucket.

5 18. Apparatus according to claims 14, wherein the radially outer face [54] of each bucket is provided with side flanges [55] so as together to define a discharge path for the contents of a next successive bucket.

19. Apparatus according to claim 18, wherein at least one such side flange [55] is perforated [56] for the preferential discharge of water and  
10 retention of settled material.

20. Apparatus according to claim 19, wherein one or more run-off strips [57] is or are provided in a said radially outer bucket face for guiding liquid to such perforation(s) [56] in a said flange.

21. Apparatus according to claim 1, wherein a sleeve [32] is provided  
15 in a said pre-reaction vessel which surrounds said inlet conduit [3] at its outlet end and, with said inlet conduit, defines an annular fluid flow passage [34].

22. Apparatus according to claim 21, wherein said sleeve [32] is adjustable in height to vary its projection beyond the outlet end [33] of the  
20 inlet conduit.

23. Sand or gravel washing apparatus comprising a washing tank, means for supplying said washing tank with sand or gravel and washing water, removal means for removing settled sand or gravel from an inlet section of the tank and means for sweeping settled sand or gravel along  
25 the tank from an outlet section thereof towards such inlet section, and an outlet arranged to discharge silt and water to a settling apparatus

according to claim 1.

24. A method of washing sand or gravel comprising supplying the sand or gravel and washing water to a washing tank, allowing washed sand or gravel to settle and removing it from an inlet section of the tank, sweeping settled sand or gravel along the tank from an outlet section thereof to the inlet section for removal, passing used, silt-containing water from the washing tank to an inlet section [2] of a settling tank [1] via an inlet conduit [3] leading to a pre-reaction vessel [4] which communicates at its base with the settling tank, dosing the silt/water mixture with a flocculant, removing settled material from the inlet section [2] of the tank, sweeping settled material along the tank from an outlet section [6] towards such inlet section and discharging substantially silt-free water over an outlet weir [8].

SEPARATION OF SILT AND WATER

This invention relates to the separation of silt and water. The invention is particularly concerned with the drying of inorganic slurries such as may result from washing of sand and gravel, and in particular the washing of building sand, which results in the washing water bearing a burden of silt.

5 Freshly won sand or gravel is typically mixed with argillaceous material and this has to be removed from the sand or gravel before that sand or gravel is incorporated into concrete in a building or other civil engineering structure. If the argillaceous material is not removed from the sand or gravel, this severely weakens the concrete with potentially  
10 disastrous results. The practice has accordingly arisen of washing the sand or gravel to remove the argillaceous material. Because of its grain size, sand or gravel tends to settle quite quickly in the washing water and can easily be removed and the process results in a body of washing water carrying a burden of argillaceous silt.

15 It is also known to manufacture sand or other building material by crushing rock, and it is known to wash the crushed material to remove dust. Again, the result is water loaded with fines. Similarly, soil washing operations and certain quarrying applications result in the formation of a slurry.

20 Hitherto such a slurry has been supplied to settling lagoons where the silt is allowed to settle out over a period of time, whereafter the then silt free water can be discharged from the lagoon to the environment or for re-use.

This settling process takes a considerable period of time and the settling lagoons occupy a substantial area of land. Both of these factors are  
25 disadvantages.



It is an object of the present invention to provide a method of and apparatus for settling silt from water in which these disadvantages are alleviated.

According to the present invention there is provided apparatus for  
5 separating silt from water which comprises a settling tank having an inlet  
section, inlet means comprising an inlet conduit leading to a pre-reaction  
vessel which communicates at its base with the inlet section of the settling  
tank, said inlet conduit being valved and the apparatus being equipped  
with dosing means for the addition of flocculant to an inlet portion  
10 thereof, removal means for removing settled material from the inlet  
section of the tank and means for sweeping settled material along the tank  
from an outlet section thereof towards such inlet section, and an outlet for  
the discharge of water over weir means.

The invention includes sand or gravel washing apparatus comprising a  
15 washing tank, means for supplying said washing tank with sand or gravel  
and washing water, removal means for removing the settled sand or gravel  
from an inlet section of the tank and means for sweeping the settled sand  
or gravel along the tank from an outlet section thereof towards such inlet  
section, and an outlet for the discharge of silt and water to a settling  
20 apparatus for separating silt from water as herein defined.

The invention extends to a method of separating silt from water which  
comprises passing a silt/water mixture to an inlet section of a settling tank  
via an inlet conduit leading to a pre-reaction vessel which communicates  
at its base with the settling tank, dosing the silt/water mixture with a  
25 flocculant, removing settled material from the inlet section of the tank,  
sweeping settled material along the tank from an outlet section towards  
such inlet section and discharging substantially silt-free water over an  
outlet weir.

The invention further extends to a method of washing sand or gravel comprising supplying sand or gravel and washing water to a washing tank allowing washed sand or gravel to settle and removing it from an inlet section of the tank, sweeping settled sand or gravel along the tank from an outlet section thereof to the inlet section for removal, passing used, silt  
5 containing water from the washing tank and separating the silt from the water by a method as herein defined.

The argillaceous silt which results from the washing of land-won sand or gravel typically has rather small grain sizes, usually of the order of 75  $\mu\text{m}$   
10 down to zero. Because of this small grain size the silt is extremely slow to settle naturally. The use of a method or apparatus according to the present invention greatly speeds up this process and allows a rapid separation of the silt from the water and without occupying a large area of land. The invention is also of value in the removal of water from slurries  
15 resulting from the washing of sea-dredged gravel which slurries are largely sand-based, with a low to moderate content of clay.

In preferred embodiments of the invention there is a said inlet conduit and pre-reaction vessel at each side of the settling tank. This promotes the throughput of the apparatus.

20 Most preferably, said dosing means is arranged to add said flocculant to the or a said inlet conduit. The flocculant and silt/water mixture are thereby encouraged to mix at an early stage in processing and this promotes settling of the silt, even in the pre-reaction vessel(s).

Advantageously the or a said inlet conduit is fed from a header tank. The  
25 use of a header tank promotes continuity of feed of material to the inlet conduit and it also acts to stabilise the pressure head with which the silt-

burdened water is fed to the pre-reaction vessel and thus stabilises conditions within the system.

In some preferred embodiments of the invention the or a pre-reaction vessel at at least one side of the settling tank is in fluid flow  
5 communication with a secondary pre-reaction vessel over weir means located therebetween, the or each such secondary pre-reaction vessel also being in communication at its base with the settling tank.

We have found that such a system promotes rapid settling. A substantial proportion of settling of the silt takes place in the primary pre-reaction  
10 vessel, and water having a lower burden of silt may pass over the weir into the secondary pre-reaction vessel where a further settling can take place.

In such embodiments it is preferred that the or at least one secondary pre-reaction vessel is in fluid flow communication over weir means with a  
15 secondary fluid discharge vessel. The water passing into the discharge vessel may be fed to the settling tank or used for other purposes. In some circumstances the water from the fluid discharge vessel may even be clean enough for passing to the environment.

Advantageously the or at least one said weir means bounding a said  
20 secondary pre-reaction vessel is adjustable in height. This facilitates control of the system and promotes cleanliness of the water fed to the secondary discharge vessel.

In preferred embodiments of the invention the base of the or each pre-reaction vessel slopes downwardly towards the inlet section of the  
25 settling tank. This promotes the flow of settled silt into the inlet section of the settling tank.

Communication between any said pre-reaction vessel and the settling tank is preferably via a submerged throat. The use of such a throat tends to inhibit return flow of silt from the settling tank into the pre-reaction vessel and it stabilises the settled layer of silt particularly when it is wholly submerged in the silt layer. Preferably means is provided for adjusting the size of such throat to control flow therethrough.

Preferably spraying means is provided for spraying the interior of the or a said pre-reaction vessel for clearing accumulated silt. Such spraying conveniently takes place between runs or at the end of a run when the settling tank is substantially empty and the adoption of this feature allows periodical cleaning of that part of the apparatus.

Advantageously also, spraying means is provided for spraying water onto said removal means for clearing accumulated silt.

The removal means may be sprayed at the end of a run or between runs, or it may be sprayed while the apparatus is in operation.

The spraying means is suitably provided with water which has been separated from silt using apparatus according to the invention. Depending on the circumstances, and the cleanliness of the water which is required for such spraying, the water may be taken from the settling tank from the outlet of the settling tank or from a secondary fluid discharge vessel when such is present. Any of these provides a convenient source of spraying water.

In the most preferred embodiments of the invention the inlet section of the settling tank is deeper than its outlet section. This promotes and facilitates separation and removal of the silt from the water.

20 In the most preferred embodiments of the invention, any leakage ports in a said bucket are confined to an upper region of the bucket. Clearly the upper part of the bucket will depend on where it is on the bucket wheel. When speaking of an upper or lower region of a bucket, we denote the upper or lower region of the bucket when it is in the orientation in which  
25 it is capable of retaining the maximum amount of fluid. Depending on the shape of the rim of the bucket, this will usually be at about 90° before the bucket reaches the top of the wheel. Advantageously, any leakage ports

in a said bucket are confined to the upper third of the bucket. In this way, surface water which has accumulated in a bucket due to further settling of silt has the opportunity to run off, and by adopting this feature, we have found that little free water remains in the silt by the stage any  
5 given bucket has reached the top of the wheel.

In preferred embodiments of the invention the radially outer face of each bucket is provided with side flanges so as together to define a discharge path for the contents of a next successive bucket. This promotes the discharge from the bucket in a desired direction and helps to minimise  
10 inadvertent discharge of the silt back into the settling tank.

Advantageously at least one such side flange is perforated for the preferential discharge of water and retention of settled material. This further promotes separation of water from silt.

It is especially suitable to provide one or more run-off strips in a said  
15 radially outer bucket face for guiding liquid to those perforation(s) in a flange.

A canopy may be provided over the bucket wheel, at least over a discharge quadrant of the wheel. The canopy may be of a flexible material which will drape to adapt itself to the outer profile of the wheel.  
20 The canopy promotes retention of the silt in the buckets of the wheel until just before they reach the discharge position. Without the canopy the silt from a bucket may cascade over the preceding bucket or buckets. The canopy also restrains the silt from falling to either side of the bucket wheel.

25 Preferably a sleeve is provided in a said pre-reaction vessel which surrounds said inlet conduit at its outlet end, and which, with said inlet

20 With reference to Figures 1 to 3 apparatus for separating silt from water in accordance with the invention comprises a settling tank 1 having an inlet section 2 which is fed by inlet means comprising an inlet conduit 3 leading to a pre-reaction vessel 4 which communicates at its base with the

inlet section 2 of the settling tank 1. The inlet conduit is supplied with a valve 30 and it is also equipped with dosing means 31 whereby a flocculant can be added to a silt and water stream flowing in the inlet conduit 3. A means comprising twin bucket wheels 5 is provided for  
5 removing settled material from the inlet section 2 of the tank 1. The tank 1 has an outlet section 6 which has a hemispherical base. A helical screw blade 7 works within that hemispherical base 6 to sweep any settled material along from the outlet section of the tank to its inlet section 2. At the outlet end of the tank 1 cleaned water discharges over a weir 8 to a  
10 discharge pipe 9.

Broadly similar apparatus but which omits the inlet conduits 3 and side pre-reaction vessels 4 may be used for washing sand or gravel and such apparatus may in accordance with this invention be arranged to discharge silt laden water to the input of a silt and water separating apparatus as  
15 shown in the drawings.

As shown, there is an inlet conduit 3 and pre-reaction vessel 4 at each side of the apparatus. A header tank 10 is provided for the initial receipt of silt laden water and for feeding the inlet conduits 3.

At each side of the settling tank 1 the pre-reaction vessel 4 is in  
20 communication with a secondary pre-reaction vessel 11. Communication between these two vessels is over a weir 12. Controls 121 are provided for raising and lowering the weir 12. The secondary pre-reaction vessel 11 at each side of the settling tank is in communication with the tank inlet end section 2 in the same way as the primary pre-reaction vessel 4.

25 The secondary pre-reaction vessel 11 is likewise in contact over a weir 13 with a secondary discharge vessel 14. Weir controls 131 are provided for these secondary weirs.



The weir control means and weirs are shown in greater detail in Figure 6.

As shown particularly in Figure 1 the bases 41, 111 of the pre-reaction vessels 4, 11 slope downwardly towards the inlet section 2 of the settling tank. The side pre-reaction vessels 4, 11 communicate with the inlet  
5 section 2 of the settling tank by means of a submerged throat such as that shown at 16 in Figure 1. Means such as a slide plate 161 may be provided for adjusting the size of such throat to control flow therethrough.

Spray heads 17 are provided for spraying the interior of the pre-reaction  
10 vessels 4, 11 after they have been emptied in order to clear accumulated silt which is sticking to their walls. Similarly, spray heads 18 are provided for spray cleaning the buckets of the bucket wheel 5.

As shown in Figure 2 the base 21 of the inlet section of the settling tank is at a lower level than the base 61 of the outlet section 6 of the settling  
15 tank. This provides a well in which the bucket wheel 5 can operate for the efficient removal of settled silt material from the apparatus.

As shown particularly in Figures 1 and 3 the inlet conduit 3 is provided with a sleeve 32 where it enters the pre-reaction vessel 4. Each sleeve 32 surrounds the outlet end 33 of the inlet conduit 3, and with that inlet  
20 conduit, defines an annular passage 34 for fluid flow.

The sleeve 32 is adjustable in height so as to vary its projection beyond the outlet end 33 of the inlet conduit 3.

The screw 7 for sweeping settled silt material towards the inlet end 2 of the settling tank 1 is driven by drive motor 71 shown in Figure 3. The  
25 silt swept by the screw 7 enters the deeper inlet section 2 of the settling

tank where it may be picked up by the bucket wheel 5 and transferred to an outlet discharge chute 19. The material discharge from the outlet chute 19 may fall into a vehicle onto a conveyor or direct to ground. A canopy 20 is provided over the bucket wheels 5 in their discharge quadrant in order to restrain semi solid material from falling into the preceding buckets or to either side of the bucket wheels 5. The canopy 20 may be anchored simply at its upper end, and it may be of a flexible material which will drape to adapt itself to the outer profile of the wheel and so assist in retaining the semi-solid silt in the respective buckets until an appropriate time for discharge into the chute 19.

A bucket wheel 5 is shown in greater detail in Figure 4. As may be inferred from Figure 4 the bucket wheel 5 in this particular embodiment consists of eight sub-assemblies each consisting of three buckets 51 assembled to a support bar 52. The support bars 52 are carried at the end of spokes 53 of the bucket wheel 5. A detail of such a three-bucket sub-assembly is shown in Figure 5. As will be seen in Figures 4 and 5 the radially outer face 54 of each bucket 51 is provided with side flanges 55 and these side flanges and the radially outer face 54 of the bucket 51 together serve to define a guide chute which guides collected silt into the discharge chute 19.

At one or both sides of the bucket wheel such side flange 55 is provided with drainage holes 56 through which water may be discharged to fall back into the inlet section 2 of the settling tank. Guide formations 57 are provided on the external radially outward face 54 of the buckets 51 in order to guide water to those holes 56. The guides 57 may take the form of ridges or of channels as desired. Slots 58 are provided in an upper region of each bucket as shown.



## 13

## CLAIMS

1. Apparatus for separating silt from water which comprises a settling tank [1] having an inlet section [2], inlet means comprising an inlet conduit [3] leading to a pre-reaction vessel [4] which communicates at its base with a sump [21] in the inlet section of the settling tank [2], said inlet conduit [3] being valved [30], and the apparatus being equipped with dosing means [31] for the addition of flocculant to an inlet portion thereof, removal means [5] for removing settled material from the sump [21] and means [7] for sweeping settled material along the tank [1] from an outlet section [6] thereof towards such sump [21], and an outlet for the discharge of water over weir means [8].
2. Apparatus according to claim 1, wherein there is a said inlet conduit [3] and pre-reaction vessel [4] at each side of the settling tank [1].
3. Apparatus according to claim 1 or 2, wherein said dosing means [31] is arranged to add said flocculant to the or a said inlet conduit [3].
4. Apparatus according to any preceding claim, wherein the or a pre-reaction vessel [4] at at least one side of the settling tank [1] is in fluid flow communication with a secondary pre-reaction vessel [11] over weir means [12] located therebetween, the or each such secondary pre-reaction vessel [11] also being in communication at its base with the sump [21].
5. Apparatus according to claim 4, wherein the or at least one secondary pre-reaction vessel [11] is in fluid flow communication over weir means [13] with a secondary fluid discharge vessel [14].
6. Apparatus according to claim 4 or 5, wherein the or at least one said weir means [12, 13] bounding a said secondary pre-reaction vessel [11] is adjustable in height.

AHT0210 Jan 2002

14

7. Apparatus according to any preceding claim, wherein the base [41, 111] of the or each pre-reaction vessel [4, 11] slopes downwardly towards the inlet section [2] of the settling tank.
8. Apparatus according to any preceding claim, wherein  
5 communication between any said pre-reaction vessel and said settling tank is via a submerged throat [16].
9. Apparatus according to any preceding claim, wherein spraying means [17] is provided for spraying the interior of the or a said pre-reaction vessel [4, 11] for clearing accumulated silt.
10. Apparatus according to any preceding claim, wherein spraying  
10 means [18] is provided for spraying water onto said removal means [5] for clearing accumulated silt.
11. Apparatus according to claim 9 or 10, wherein said spraying means [18] is provided with water from said settling tank.
12. Apparatus according to any preceding claim, wherein said outlet  
15 section [6] is of part-circular cross-section, and the sweeping means comprises a helical sweeping blade [7], and means [71] for driving such blade in rotation about its axis.
13. Apparatus according to any preceding claim, wherein said removal  
20 means comprises a bucket wheel [5].
14. Apparatus according to claim 13, wherein said bucket wheel [5] includes buckets [51] which comprise leakage paths [56-58] for the preferential discharge of water and retention of settled material.
15. Apparatus according to claim 14, wherein any leakage ports [58] in  
25 a said bucket [51] are confined to an upper region of the bucket.

AHT0210 Jan 2002

15

16. Apparatus according to claim 15, wherein any leakage ports in a said bucket are confined to an upper third of the bucket.
17. Apparatus according to any of claims 13 to 16, wherein the radially outer face [54] of each bucket is provided with side flanges [55] so as together to define a discharge path for the contents of a next successive bucket.
18. Apparatus according to claim 17, wherein at least one such side flange [55] is perforated [56] for the preferential discharge of water and retention of settled material.
19. Apparatus according to claim 18, wherein one or more run-off strips [57] is or are provided in a said radially outer bucket face for guiding liquid to such perforation(s) [56] in a said flange.
20. Apparatus according to any preceding claim, wherein a sleeve [32] is provided in a said pre-reaction vessel which surrounds said inlet conduit [3] at its outlet end and, with said inlet conduit, defines an annular fluid flow passage [34].
21. Apparatus according to claim 20, wherein said sleeve [32] is adjustable in height to vary its projection beyond the outlet end [33] of the inlet conduit.
22. Sand or gravel washing apparatus comprising a washing tank, means for supplying said washing tank with sand or gravel and washing water, removal means for removing settled sand or gravel from an inlet section of the tank and means for sweeping settled sand or gravel along the tank from an outlet section thereof towards such inlet section, and an outlet arranged to discharge silt and water to a settling apparatus according to any preceding claim.

AHT0210 Jan 2002

16

23. A method of washing sand or gravel comprising supplying the sand or gravel and washing water to a washing tank, allowing washed sand or gravel to settle and removing it from an inlet section of the tank, sweeping settled sand or gravel along the tank from an outlet section thereof to the inlet section for removal, passing used, silt-containing water from the washing tank to an inlet section [2] of a settling tank [1] via an inlet conduit [3] leading to a pre-reaction vessel [4] which communicates at its base with the settling tank, dosing the silt/water mixture with a flocculant, removing settled material from the inlet section [2] of the tank, sweeping settled material along the tank from an outlet section [6] towards such inlet section and discharging substantially silt-free water over an outlet weir [8].

24. Apparatus for separating silt from water substantially as herein described with reference to the accompanying drawings.

25. A method of separating silt from water substantially as herein described with reference to the accompanying drawings.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
19 April 2001 (19.04.2001)

PCT

(10) International Publication Number  
**WO 01/26771 A1**

- (51) International Patent Classification<sup>7</sup>: **B01D 21/06**, 21/08, 21/24, B03B 11/00
- (21) International Application Number: PCT/GB00/03827
- (22) International Filing Date: 6 October 2000 (06.10.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
9923853.7 9 October 1999 (09.10.1999) GB
- (71) Applicant (for all designated States except US): **FINLAY HYDRASCREENS (OMAGH) LTD.** [GB/GB]; Drumquin Road, Omagh, Co. Tyrone, N. Ireland BT78 5PN (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LYONS, David** [GB/GB]; 49 Main Street, Sixmilecross, Co. Tyrone, Northern Ireland (GB). **NETHERY, John** [GB/GB]; 108 Castlederg Road, Drumquin, Omagh, Co. Tyrone, Northern Ireland (GB).
- (74) Agent: **BARKER BRETTELL**; 138 Hagley Road, Edgbaston, Birmingham B16 9PW (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
- With international search report.
  - Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SEPARATION OF SILT AND WATER

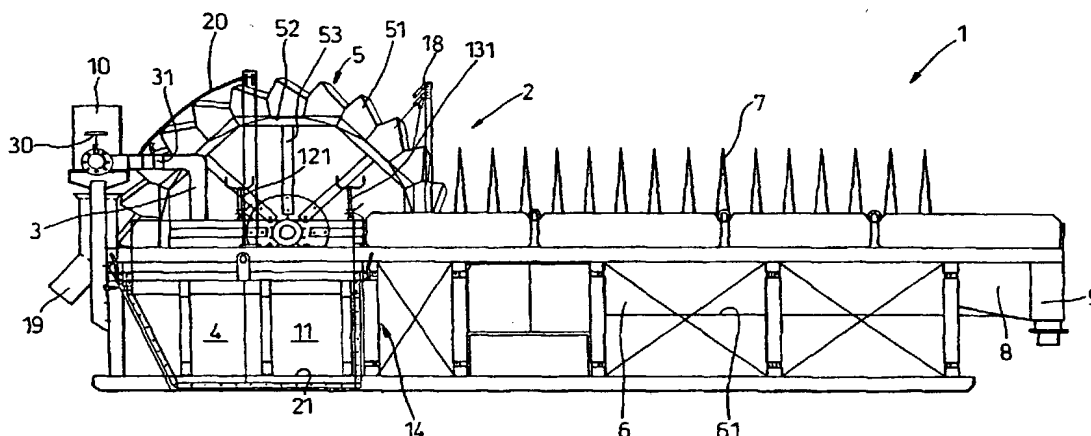

(57) Abstract: Apparatus for separating silt from water comprises a settling tank (1) having an inlet section (2) and inlet means comprising an inlet conduit (3) leading to a pre-reaction vessel (4) which communicates at its base with the inlet section of the settling tank. The inlet conduit is supplied with a valve (30), and the apparatus is equipped with dosing means (31) for the addition of flocculate to an inlet portion thereof. Means such as bucket wheels (5) are provided for removing settled material from the inlet section (2) of the tank (1) and means such as a helical screw (7) are also provided for sweeping settled material along the tank (1) from an outlet section (6) towards that inlet section (2). An outlet is provided for the discharge of water over a weir (8). Apparatus for washing sand or gravel which feeds used wash water to such a settling tank is also disclosed, as are methods of separating silt and water and of washing sand or gravel.

WO 01/26771 A1



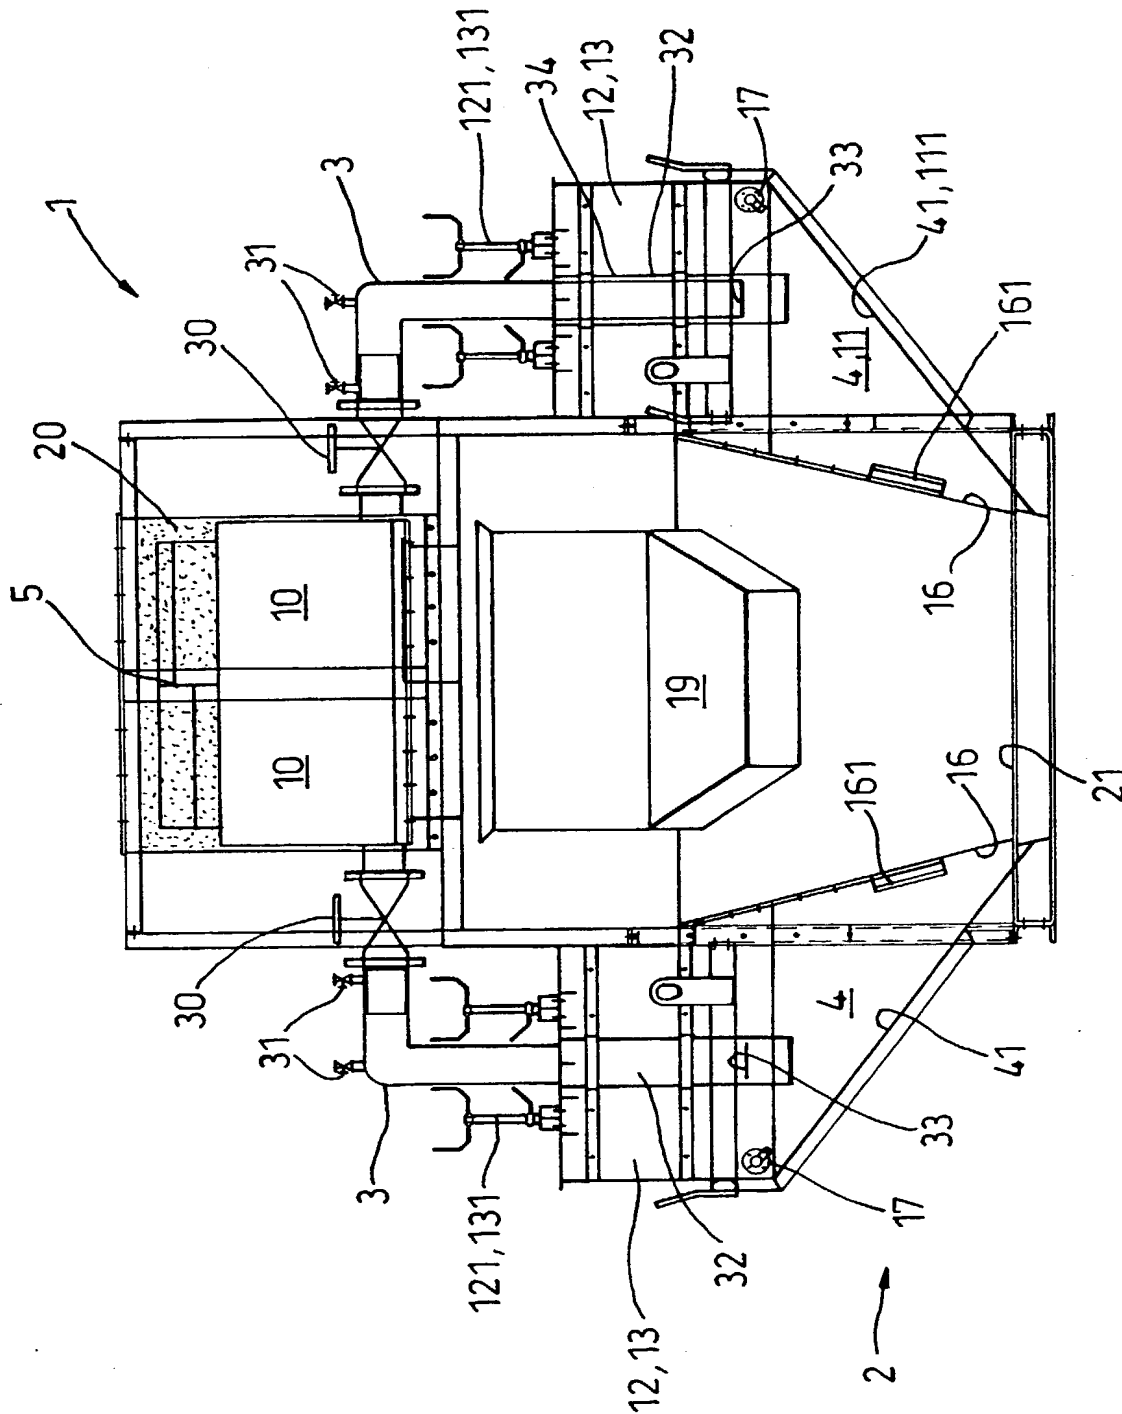
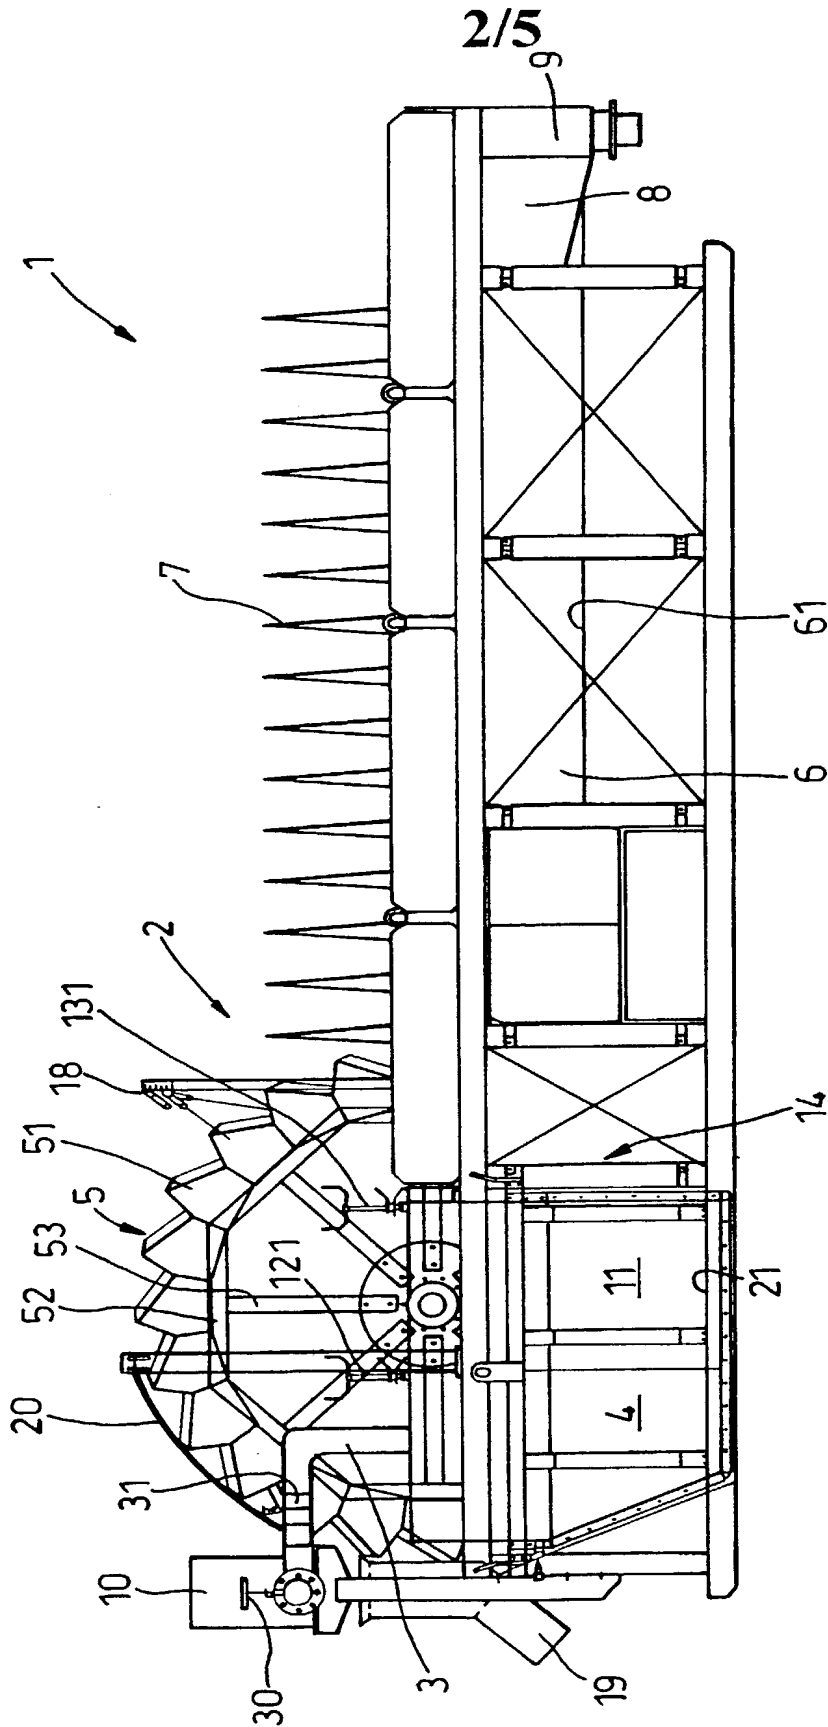


Fig. 1



**Fig. 2**

3/5

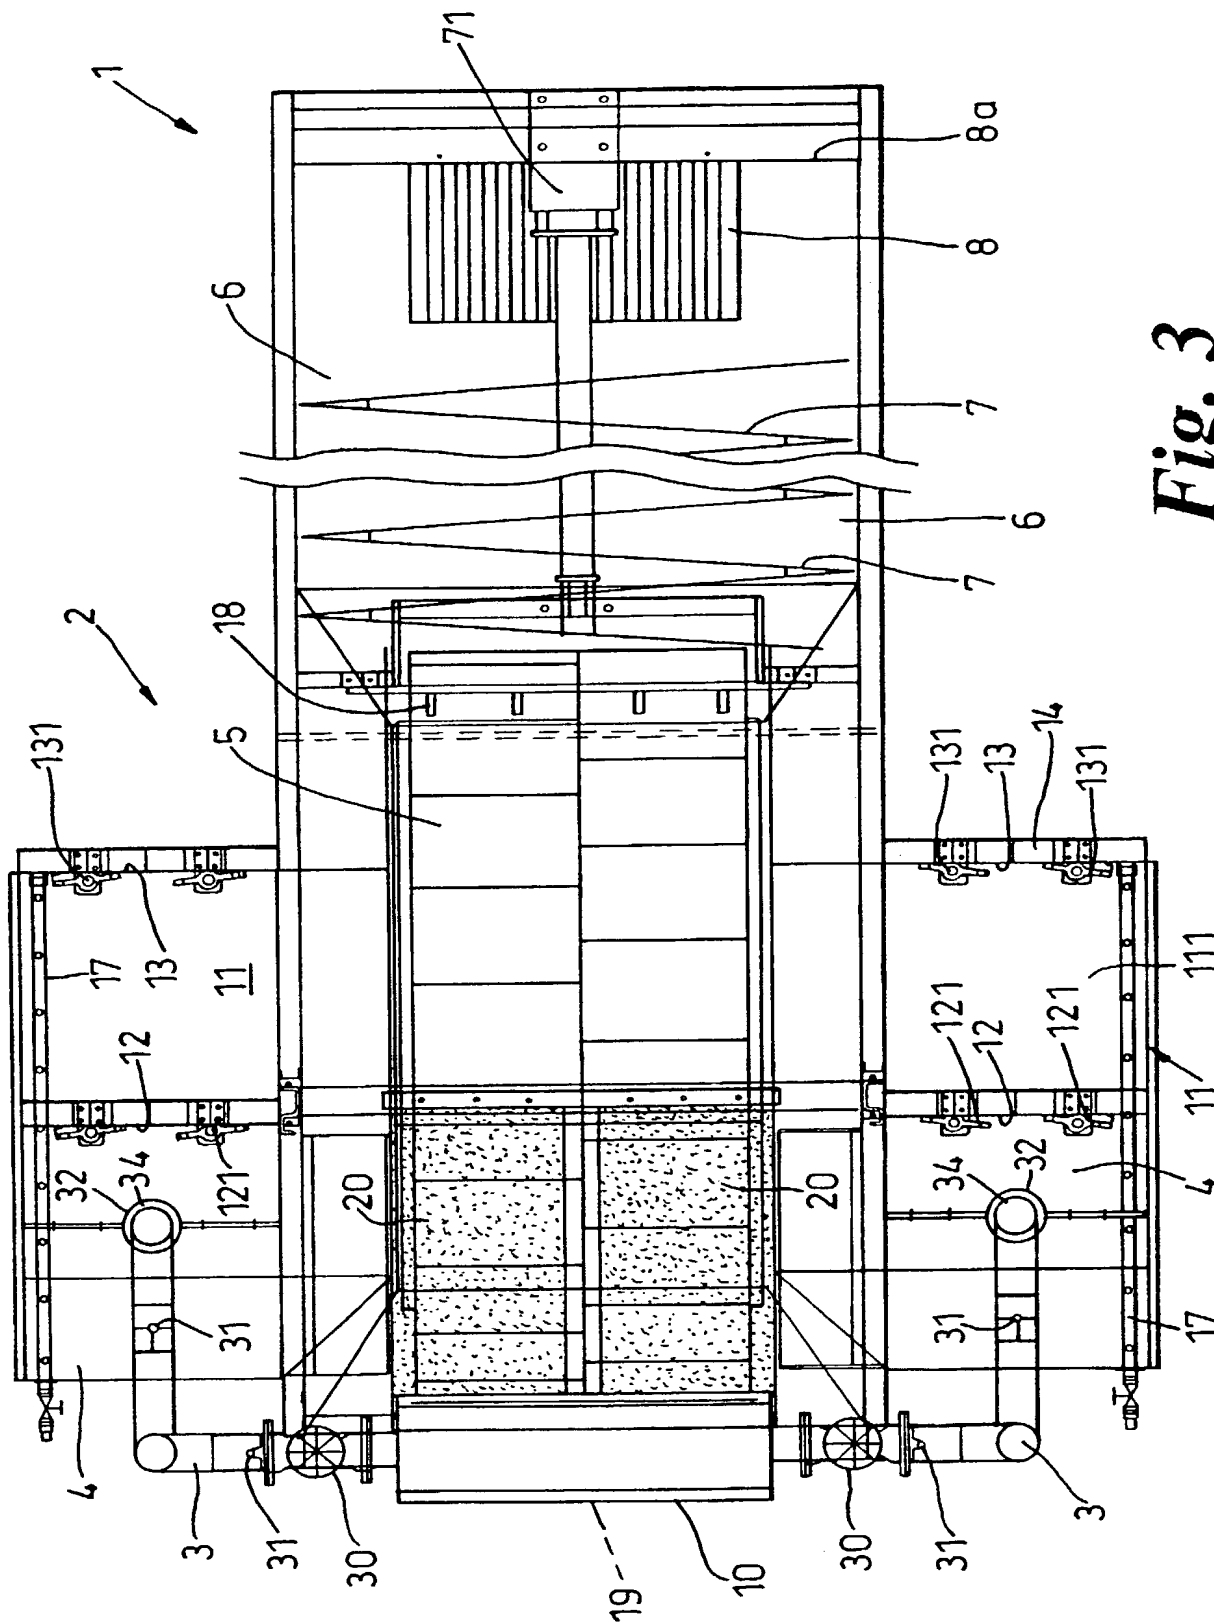


Fig. 3

4/5

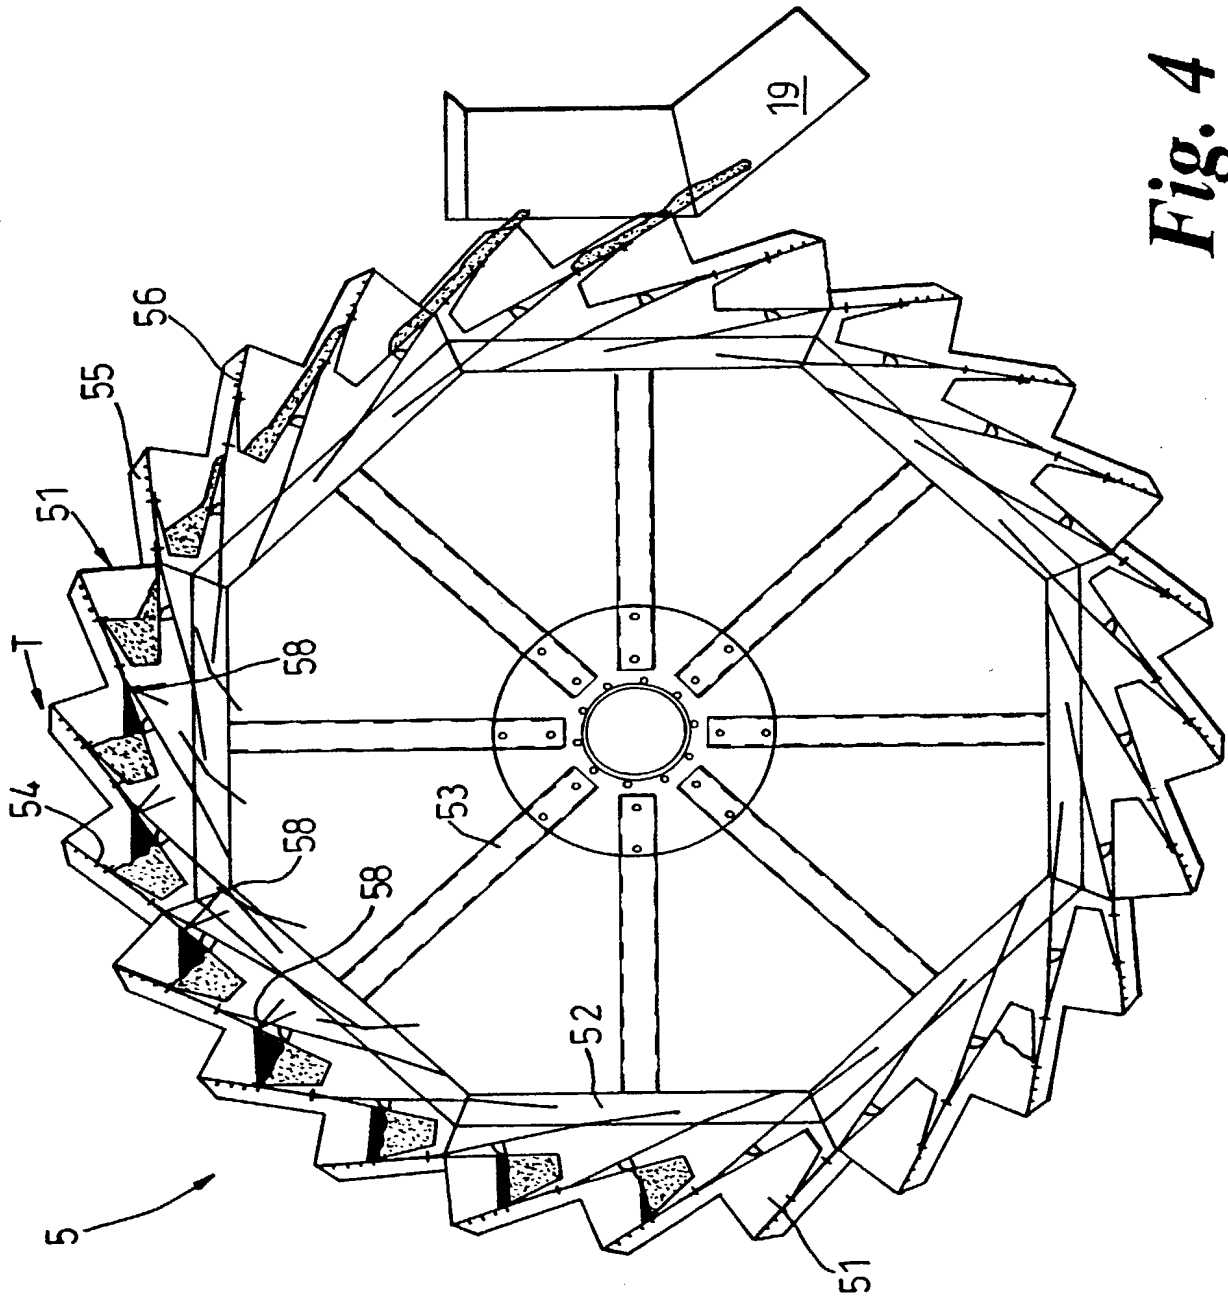


Fig. 4

5/5

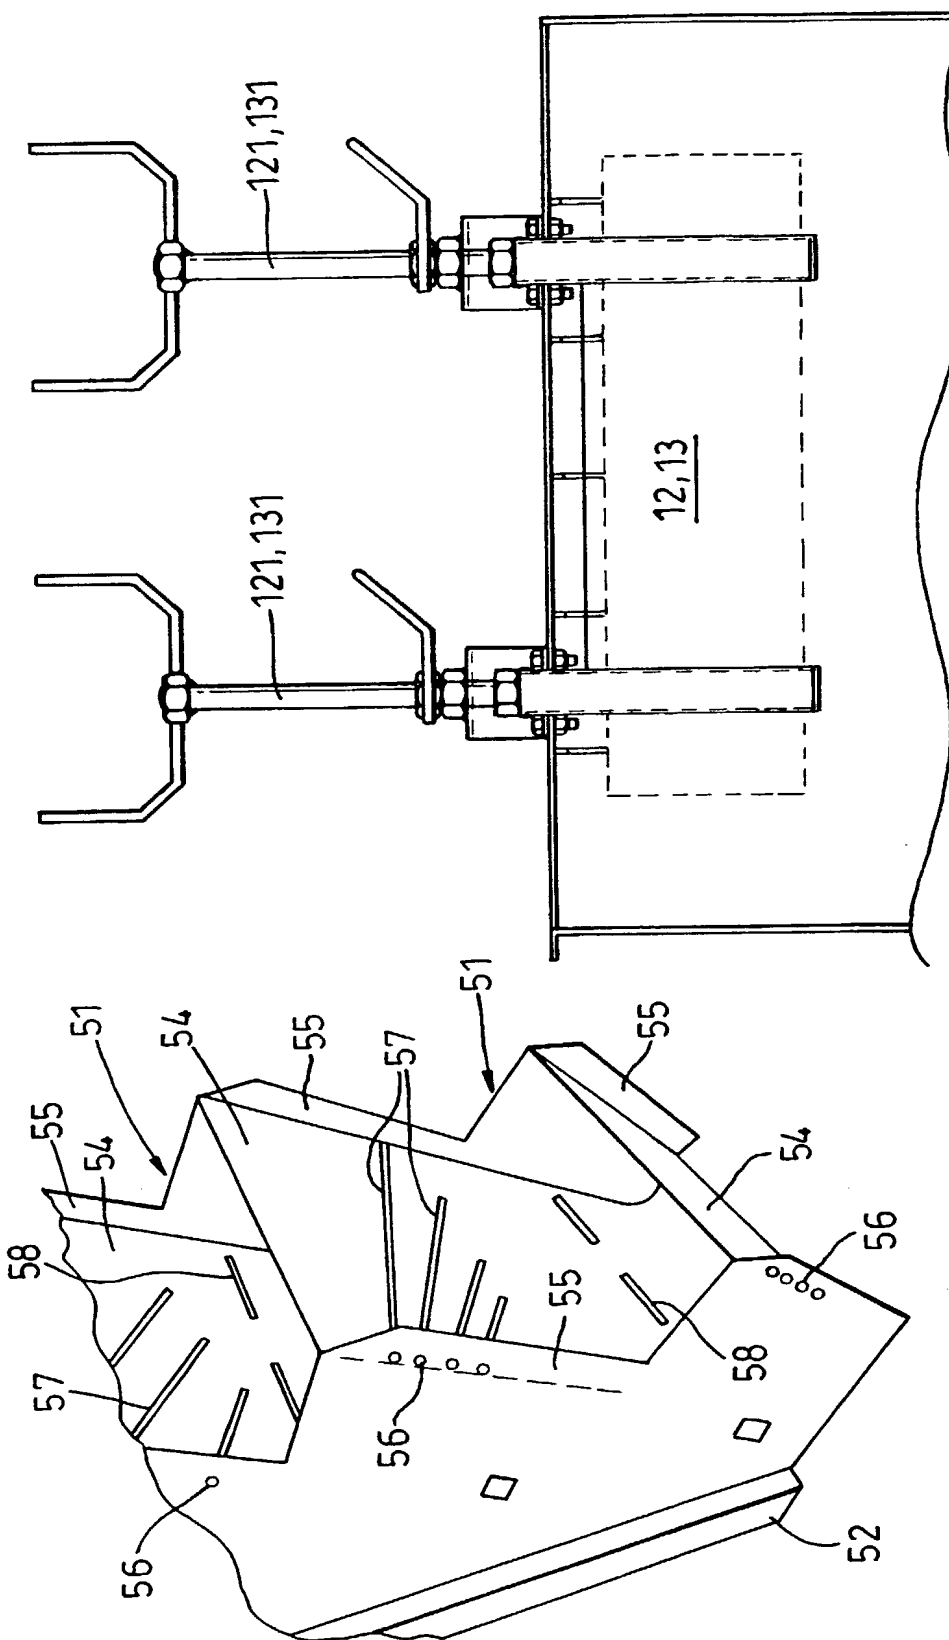


Fig. 6

Fig. 5

**DECLARATION**  
**AND**  
**POWER OF ATTORNEY**

As a below named inventors, we hereby declare that:

Our residences, post office addresses and citizenships are as stated below next to our names.

We believe we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled SEPARATION OF SILT AND WATER, the specification of which

(check one)      ☐      is attached hereto.

☒      was filed on April 8, 2002 as Application Serial  
                          No. 10/089,968 and was amended on \_\_\_\_\_  
                          \_\_\_\_\_ (if applicable)

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

We hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate or of any PCT international applications designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international applications(s) designating at least one country other than the United States of America filed by us on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

<b>PRIOR FOREIGN APPLICATION(S) UNDER 35 U.S.C. 119(a)-(d)</b>				
<b>Number</b>	<b>Country</b>	<b>Filing Date</b>	<b>Priority Claimed</b>	
			<b>Yes</b>	<b>No</b>
<b>GB 9923853.7</b>	<b>Great Britain</b>	<b>10 October 1999</b>	<b>X</b>	

We hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

<b>CLAIM FOR BENEFIT OF PRIOR U.S. PROVISIONAL APPLICATION(S) UNDER 35 U.S.C. 119(e)</b>	
<b>Provisional Application Number</b>	<b>Filing Date</b>

We hereby claim the benefit under Title 35, United States Codes, §120, of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 that occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

<b>PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120</b>				
<b>U.S. Applications</b>		<b>Status (check one)</b>		
<b>U.S. Applications</b>	<b>Filing Date</b>	<b>Patented</b>	<b>Pending</b>	<b>Abandoned</b>

<b>PCT APPLICATIONS DESIGNATING THE U.S.</b>		
<b>Application No.</b>	<b>Filing Date</b>	<b>U.S. Application No. Assigned (if any)</b>
<b>PCT/GB99/03827</b>	<b>6 October 2000</b>	

2 We hereby appoint Steven J. Goldstein, Registration No. 28,079; Edwin R. Acheson, Jr., Registration No. 31,808; Stephen R. Albainy-Jenei, Registration No. 41,487; David E. Franklin, Registration No. 39,194; William E. Gallagher, Registration No. 35,145; James M. Kipling, Registration No. 26,287; Ann G. Robinson, Registration No. 39,820; Ria Farrell Schalnat, Registration No. 47,058; David E. Schmit, Registration No. 28,472; Karlyn A. Schnapp, Registration No. 45,558; Ralph J. Skinkiss, Registration No. 26,105; and Kevin S. Sprecher, Registration No. 42,165; c/o Frost Brown Todd LLC, 2200 PNC Center, 201 East Fifth Street, Cincinnati, Ohio 45202 (513) 651-6800 my attorneys, with full power in each of them, of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

The undersigned hereby authorizes the above-named U.S. attorneys to accept and follow instructions from Barker Brettell as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the undersigned and the aforementioned U.S. attorneys. In the event of a change in the firm or persons from whom instructions may be taken, the aforementioned U.S. attorneys will be so notified in writing by the undersigned.

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first inventor: David Lyons

1<sup>st</sup> Inventor's Signature David Lyons 22/7/02.  
(Date)

Residence: Co. Tyrone, Northern Ireland GBX

Citizenship: United Kingdom

Post Office Address: 49 Main Street, Sixmilecross, Co. Tyrone, Northern Ireland

Full name of second joint inventor: John Nethery

2<sup>nd</sup> Inventor's Signature John Nethery 24/7/02  
(Date)

Residence: Omagh, Co. Tyrone, Northern Ireland GBX

Citizenship: United Kingdom

Post Office Address: 108 Castlederg Road, Drumquin, Omagh, Co. Tyrone, Northern Ireland